


ADSL LINE TRANSFORMERS

FEATURES

- Matched to Texas Instruments' AP5, AR5 and AU5 chipsets
- Excellent THD performance in a small footprint




Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Mounting	Turns Ratio (1-4):(10-7) (± 2%)	DC Resistance (Ω)		Leakage Inductance @ 100 kHz, 0.1 Vrms MAX (1-4) with (7-10) shorted	Inductance @ 100 kHz, 1 V (1-4)
			(1-4)	(10-7)		
ST-S2361	THT	2:1	≤ 2.00	≤ 0.55	15 μH	1.5 mH ±5%
ST-S2382	SMT	2:1	≤ 2.00	≤ 0.55	15 μH	1.5 mH ±5%

Additional Specifications

Part Number	THD (@ 100 kHz, 5.3 Vrms)	Load Resistance (Ω)	Isolation Voltage (Vrms)	Longitudinal Balance (from 30 kHz to 1.1 MHz)
ST-S2361	≤ -80 dB	100	1500	≤ -60 dB
ST-S2382	≤ -80 dB	100	1500	≤ -60 dB

Mechanical

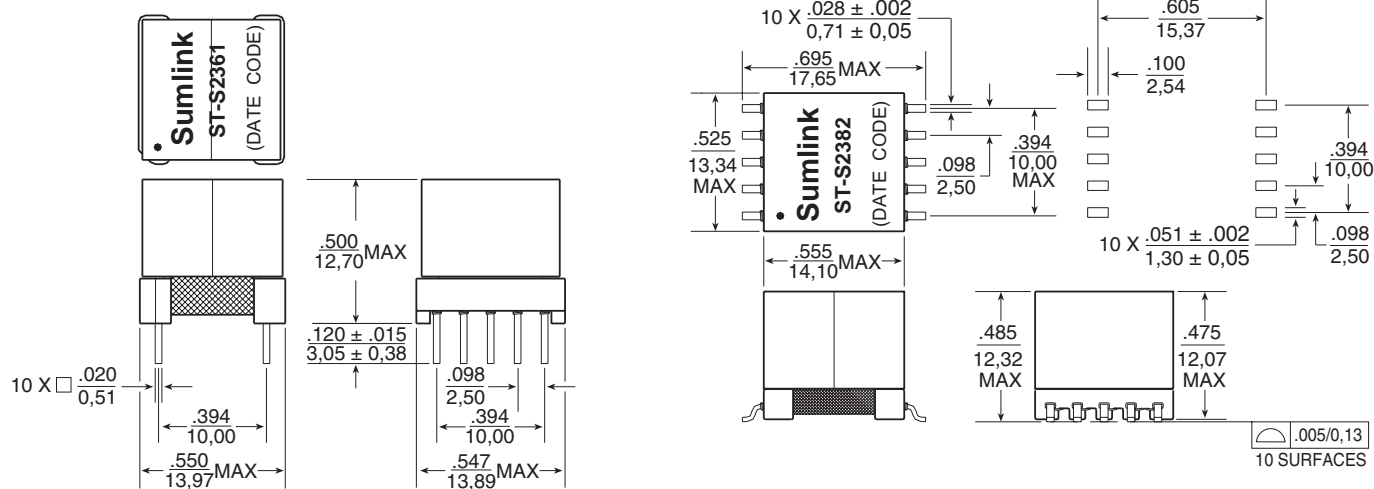

Schematic

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

